


flowable

“flowable

Flowable	OA		
1.		()
2.	, 2/3	()
3.			1 a 0.2 0.1
5.	a b,b c,		

www.shareniu.com 分享牛原创

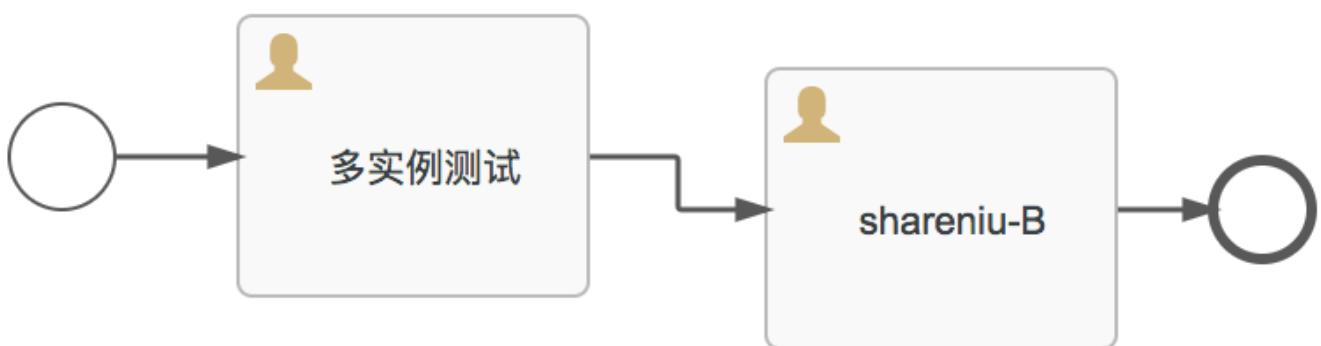

xml :

```
<?xml version="1.0" encoding="UTF-8"?>

<definitions xmlns="http://www.omg.org/spec/BPMN/20100524/MODEL"
  xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
  xmlns:xsd="http://www.w3.org/2001/XMLSchema" xmlns:flowable="http://flowable.org/bpmn"
  xmlns:bpmndi="http://www.omg.org/spec/BPMN/20100524/DI"
  xmlns:omgdc="http://www.omg.org/spec/DD/20100524/DC"
```

```
xmlns:omgdi="http://www.omg.org/spec/DD/20100524/DI"
typeLanguage="http://www.w3.org/2001/XMLSchema"
expressionLanguage="http://www.w3.org/1999/XPath"
targetNamespace="http://www.flowable.org/processdef">

<process id="multiInstance" name="multiInstance" isExecutable="true">

    <documentation>multiInstance</documentation>

    <startEvent id="startEvent1"></startEvent>

    <userTask id="A" name="" xmlns:shareniu="http://www.shareniu.com" shareniu:shareniuext="" shareniu:shareniuextboolen="false">

        <multiInstanceLoopCharacteristics isSequential="true">

            <loopCardinality>2</loopCardinality>

        </multiInstanceLoopCharacteristics>

    </userTask>

    <sequenceFlow id="sid-6D482A8A-F796-4E2B-AB2C-ABBFD2DA428D" sourceRef="startEvent1" targetRef="A"></sequenceFlow>

    <userTask id="shareniu-B" name="shareniu-B" xmlns:shareniu="http://www.shareniu.com" shareniu:shareniuext="" shareniu:shareniuextboolen="false"></userTask>

    <sequenceFlow id="sid-BA8FC337-40DC-493B-805C-F213B7C4A17D" sourceRef="A" targetRef="shareniu-B"></sequenceFlow>

    <endEvent id="sid-4AC81F5B-49F8-4135-B68E-1C182D004080"></endEvent>

    <sequenceFlow id="sid-DF962BB4-EA4C-4D86-9A91-214EB2EC1A47" sourceRef="shareniu-B" targetRef="sid-4AC81F5B-49F8-4135-B68E-1C182D004080"></sequenceFlow>

</process>
```

```
<bpmdi: BPMNDiagram id="BPMNDiagram_multiInstance">

<bpmdi: BPMNPlane bpmnElement="multiInstance" id="BPMNPlane_multiInstance">

<bpmdi: BPMNShape bpmnElement="startEvent1" id="BPMNShape_startEvent1">

<omgdc: Bounds height="30. 0" width="30. 0" x="100. 0" y="130. 0"></omgdc: Bounds>

</bpmdi: BPMNShape>

<bpmdi: BPMNShape bpmnElement="A" id="BPMNShape_A">

<omgdc: Bounds height="80. 0" width="100. 0" x="165. 0" y="105. 0"></omgdc: Bounds>

</bpmdi: BPMNShape>

<bpmdi: BPMNShape bpmnElement="shareniu-B" id="BPMNShape_shareniu-B">

<omgdc: Bounds height="80. 0" width="100. 0" x="315. 0" y="120. 0"></omgdc: Bounds>

</bpmdi: BPMNShape>

<bpmdi: BPMNShape bpmnElement="sid- 4AC81F5B- 49F8- 4135- B68E- 1C182D004080"
id="BPMNShape_sid- 4AC81F5B- 49F8- 4135- B68E- 1C182D004080">

<omgdc: Bounds height="28. 0" width="28. 0" x="442. 0" y="146. 0"></omgdc: Bounds>

</bpmdi: BPMNShape>

<bpmdi: BPMNEdge bpmnElement="sid- DF962BB4- EA4C- 4D86- 9A91- 214EB2EC1A47"
id="BPMNEdge_sid- DF962BB4- EA4C- 4D86- 9A91- 214EB2EC1A47">

<omgdi: waypoint x="414. 949999999902" y="160. 0"></omgdi: waypoint>

<omgdi: waypoint x="442. 0" y="160. 0"></omgdi: waypoint>

</bpmdi: BPMNEdge>

<bpmdi: BPMNEdge bpmnElement="sid- BA8FC337- 40DC- 493B- 805C- F213B7C4A17D"
id="BPMNEdge_sid- BA8FC337- 40DC- 493B- 805C- F213B7C4A17D">
```

```

<omgdi: waypoint x="264. 95000000000005" y="145. 0"></omgdi: waypoint>

<omgdi: waypoint x="290. 0" y="145. 0"></omgdi: waypoint>

<omgdi: waypoint x="290. 0" y="160. 0"></omgdi: waypoint>

<omgdi: waypoint x="314. 9999999998477" y="160. 0"></omgdi: waypoint>

</bpnmdi: BPMNEdge>

<bpmndi: BPMNEdge bpmnElement="sid- 6D482A8A-F796- 4E2B- AB2C- ABBFD2DA428D"
id="BPMNEdge_sid- 6D482A8A-F796- 4E2B- AB2C- ABBFD2DA428D">

<omgdi: waypoint x="129. 94999817301806" y="145. 0"></omgdi: waypoint>

<omgdi: waypoint x="165. 0" y="145. 0"></omgdi: waypoint>

</bpnmdi: BPMNEdge>

</bpnmdi: BPMNPlane>

</bpnmdi: BPMNDiagram>

</definitions>

```

» xml

1. flowable:candidateUsers="shareniu1,shareniu2,shareniu3,shareniu4" 4
2. |<loopCardinality>2</loopCardinality>| 2
3. |<multiInstanceLoopCharacteristics isSequential="true">|

```
|<multiInstanceLoopCharacteristics isSequential="true">| isSequential true    isSequential false
```

```
@Test
```

```
public void addBytes() {
```

```

byte[ ] bytes = IoUtil.readInputStream(
    ProcessengineTest.class.getClassLoader()
        .getResourceAsStream("com/shareniu/shareniu_flowable_study/bpmn/ch3/multiInstance.bpmn20.xml"),
    "multiInstance.bpmn20.xml");

String resourceName = "multiInstance.bpmn";

Deployment deployment = repositoryService.createDeployment().addBytes(resourceName,
bytes).deploy();

System.out.println(deployment);

```

④

```

@Test

public void startProcessInstanceByKey() {
    String processDefinitionKey = "multiInstance";
    ProcessInstance startProcessInstanceByKey =
        runtimeService.startProcessInstanceByKey(processDefinitionKey);

    System.out.println(startProcessInstanceByKey);
}

```

⑤

ACT_RU_TASK

ID_	REV_	PROC_DEF_ID_	NAME_	EXECUTION_ID_	PROC_INST_ID_	TASK_DEF_ID_	SC
15011	1	multiInstance:1:1250	多实例测试	15005	15001	(NULL)	(N)

www.shareniu.com 分享牛原创

ACT_RU_IDENTITYLINK

ID_	REV_	GROUP_ID_	TYPE_	USER_ID_	TASK_ID_	PROC_INST_ID_
15012	1	(NULL)	candidate	shareniu1	15011	(NULL)
15013	1	(NULL)	participant	shareniu1	(NULL)	15001
15014	1	(NULL)	candidate	shareniu2	15011	(NULL)
15015	1	(NULL)	participant	shareniu2	(NULL)	15001
15016	1	(NULL)	candidate	shareniu3	15011	(NULL)
15017	1	(NULL)	participant	shareniu3	(NULL)	15001
15018	1	(NULL)	candidate	shareniu4	15011	(NULL)
15019	1	(NULL)	participant	shareniu4	(NULL)	15001

ACT RU IDENTITYLINK shareniu1,shareniu2,shareniu3,shareniu4

ACT RU VARIABLE

ID_	REV_	TYPE_	NAME_	EXECUTION_ID_	PROC_INST_ID_	TASK_ID_	SCOPE_ID_	SUB_SCOPE_ID_
15006	1	integer	nrOfInstances	15004	15001	(NULL)	(NULL)	(NULL)
15007	1	integer	nrOfCompletions	15004	15001	(NULL)	(NULL)	(NULL)
15008	1	integer	nrOfActiveItems	15004	15001	www.shareniu.com 分享牛原创		
15009	1	integer	loopCount	15005	15001	(NULL)	(NULL)	(NULL)

- 1. nrOfInstances
 - 2. nrOfCompletedInstances nr number
 - 3. loopCounter
 - 4. nrOfActiveInstances

@Test

```
    public void complete() {  
        String taskId="15011";  
        taskService.complete(taskId);  
    }  
}
```

ACT RU VARIABLE

TYPE_	NAME_	EXECUTION_ID_	PROC_INST_ID_	LONG_	TEXT_
integer	nrOfInstances	15004	15001	2	2
integer	nrOfCompletedInstances	15004	15001	1	1
integer	nrOfActiveInstances	15004	15001	1	1
integer	loopCounter	15005	15001	1	1

www.shareniu.com 分享牛原创

nrOfCompletedInstances loopCounter nrOfActiveInstances 1

2 ACT_RU_IDENTITYLINK

```
@Test
```

```
public void complete() {
    String taskId="17502";
    taskService.complete(taskId);
}
```

ACT_RU_TASK

```
isSequential="false",
```

```
isSequential="false",
```

ACT_RU_TASK

ID_	REV_	PROC_DEF_ID_	NAME_	EXECUTION_ID_	PROC_INST_ID_	TASK_DEF_ID_	SCOPE_ID_	SUB_SCOPE_ID_
27512	1	multiInstance:2:250 多实例测试	27508	27508	27501	(NULL)	(NULL)	(NULL)
27523	1	multiInstance:2:250 多实例测试	27509	27509	27501	(NULL)	(NULL)	(NULL)

www.shareniu.com 分享牛原创

2 2 2

ok

2

1

1.

```
<process id="multiInstance" name="multiInstance"
isExecutable="true">

    <documentation>multiInstance</documentation>

    <startEvent id="startEvent1"></startEvent>

    <userTask id="A" name="">
        <flowable: candidateUsers="shareniu1,shareniu2,shareniu3,shareniu4">
            <multiInstanceLoopCharacteristics
                isSequential="true">
                <loopCardinality>4</loopCardinality>
                <completionCondition>${nrOfCompletedInstances/nrOfInstances >= 0.25}</completionCondition>
            </multiInstanceLoopCharacteristics>
        </userTask>

        <sequenceFlow
            id="sid-6D482A8A-F796-4E2B-AB2C-ABBD2DA428D" sourceRef="startEvent1">
            <targetRef="A"></sequenceFlow>

        <userTask id="shareniu-B" name="shareniu-B">
            <xmlns:shareniu="http://www.shareniu.com/" shareniu:shareniuext="">
                <shareniu:shareniuextboolen="false"></userTask>

        <sequenceFlow
            id="sid-BA8FC337-40DC-493B-805C-F213B7C4A17D" sourceRef="A">
            <targetRef="shareniu-B"></sequenceFlow>
    
```

```

    <endEvent id="sid-4AC81F5B-49F8-4135-B68E-1C182D004080"></endEvent>

    <sequenceFlow
        id="sid-DF962BB4-EA4C-4D86-9A91-214EB2EC1A47" sourceRef="shareniu-B"
        targetRef="sid-4AC81F5B-49F8-4135-B68E-1C182D004080"></sequenceFlow>

</process>

```

<completionCondition>\${nrOfCompletedInstances/nrOfInstances >= 0.25}</completionCondition>

nrOfCompletedInstances nrOfInstances 1/4

ACT_RU_TASK

ID_	REV_	PROC_DEF_ID_	NAME_	EXECUTION_ID_	PROC_INST_ID_	TASK_DEF_ID_	SCOPE_ID_	SUB_SC
37511	1	multiInstance:3:3501	多实例测试	37505	37501	(NULL)	(NULL)	(NULL)

www.shareniu.com 分享牛原创

ACT_RU_TASK

@Test

```

public void complete() {
    String taskId="40003";
    taskService.complete(taskId);
}

```



ACT_RU_TASK

4

1/4,

xml

xml

2

2

xml

```
<process id="multiInstance" name="multiInstance"
```

```
<isExecutable="true">

<documentation>multiInstance</documentation>

<startEvent id="startEvent1"></startEvent>

<userTask id="A" name="" flowable:assignee="${assignee}">

<multiInstanceLoopCharacteristics

    isSequential="false" flowable:collection="assigneeList"

    flowable:elementVariable="assignee">

    <completionCondition>${nrOfCompletedInstances/nrOfInstances >= 0.25}</completionCondition>

</multiInstanceLoopCharacteristics>

</userTask>

<sequenceFlow

    id="sid-6D482A8A-F796-4E2B-AB2C-ABBF2DA428D" sourceRef="startEvent1"

    targetRef="A"></sequenceFlow>

<userTask id="shareniu-B" name="shareniu-B"

    xmlns:shareniu="http://www.shareniu.com/" shareniu:shareniuext=""

    shareniu:shareniuextboolen="false"></userTask>

<sequenceFlow

    id="sid-BA8FC337-40DC-493B-805C-F213B7C4A17D" sourceRef="A"

    targetRef="shareniu-B"></sequenceFlow>
```

```

    <endEvent id="sid-4AC81F5B-49F8-4135-B68E-1C182D004080"></endEvent>

    <sequenceFlow

        id="sid-DF962BB4-EA4C-4D86-9A91-214EB2EC1A47" sourceRef="shareniu-B"

        targetRef="sid-4AC81F5B-49F8-4135-B68E-1C182D004080"></sequenceFlow>

</process>

```

```

<userTask id="userTask1" name="" flowable:assignee="${assignee}">

    <multiInstanceLoopCharacteristics isSequential="false"
activiti:collection="assigneeList" activiti:elementVariable="assignee">

        <completionCondition>${nrOfCompletedInstances/nrOfInstances >=
0.25}</completionCondition>

    </multiInstanceLoopCharacteristics>

</userTask>

```

- activiti:assignee="\${assignee}"
 - activiti:elementVariable="assignee" \${assignee}
 - activiti:collection="assigneeList"
- assigneeList

```

    @Test

    public void startProcessInstanceByKey() {

        Map<String, Object> vars = new HashMap<>();

        String[] v = { "shareniu1", "shareniu2", "shareniu3", "shareniu4" };

        vars.put("assigneeList", Arrays.asList(v));

        String processDefinitionKey = "multiInstance";
    }

```

```
ProcessInstance startProcessInstanceByKey =  
runtimeService.startProcessInstanceByKey(processDefinitionKey,  
  
vars);  
  
// Sys
```

ok

1. flowable:candidateUsers="shareniu1,shareniu2,shareniu3,shareniu4" 4
2. |loopCardinality>2</loopCardinality| 2
3. |<multiInstanceLoopCharacteristics isSequential="true">|
|<completionCondition>\${nrOfCompletedInstances/nrOfInstances >=|
0.25}</completionCondition>|

nrOfActiveInstances 1 +1

()

Revision #1

Created 30 July 2020 16:06:31 by

Updated 30 July 2020 16:18:35 by